

Inspiring Great Spaces™




CONDUCTIVE & ESD VINYL SHEET

PASTELL®

REPEATING PATTERN OF "HOM WOH" IN SMALL FONT AT THE BOTTOM OF THE PAGE.


CONDUCTIVE 2316

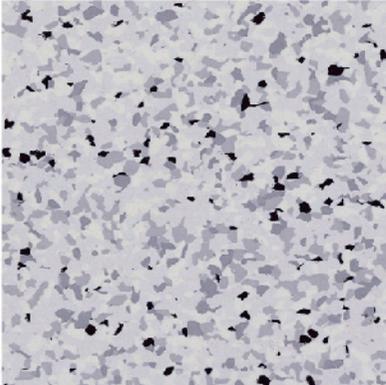

2316-002 Light Grey




2316-001 White Stone

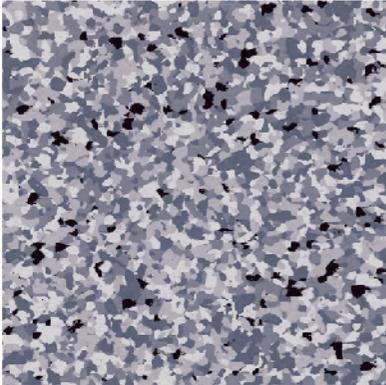


2316-003 Terre Grey




2316-201 Vintage Cream

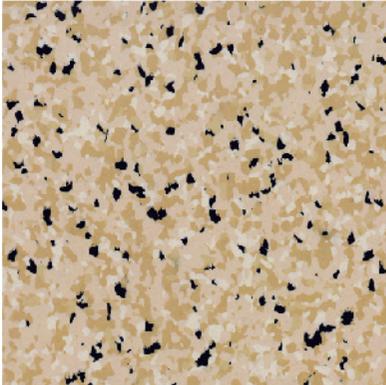


2316-301 Peace Yellow

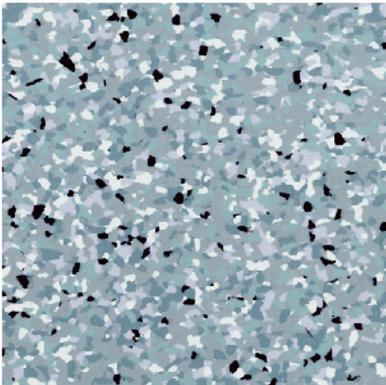

2316-501 Light Green

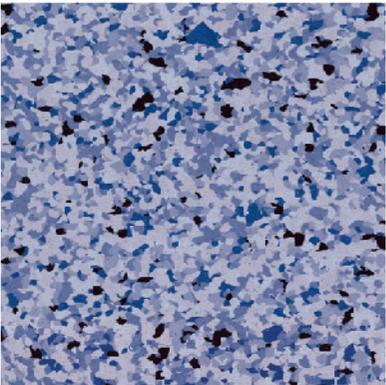


2316-602 Flake Blue

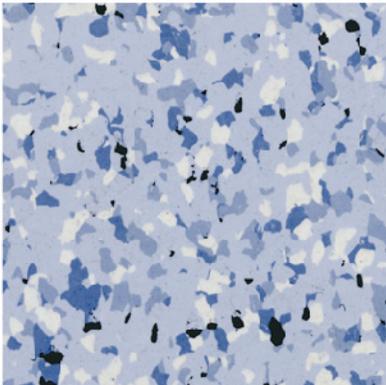


2316-601 Aqua Blue


ESD 1316

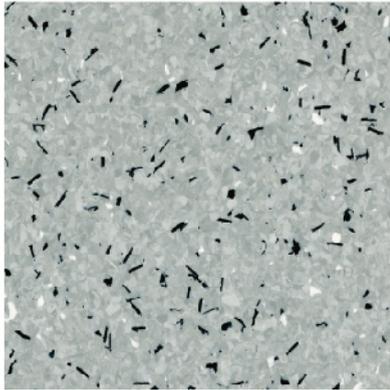


1316-012 Vintage Silver

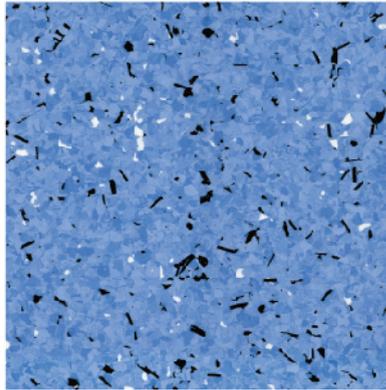


1316-611 Sky Walk

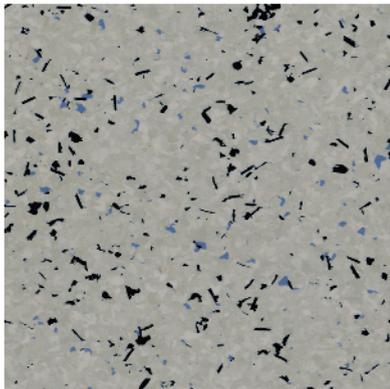


1316-011 Snow Grey

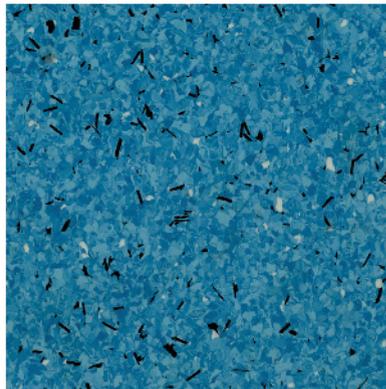

1316-605 Aqua Star

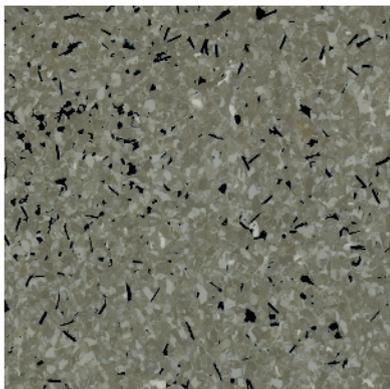


1316-013 Flake Stone

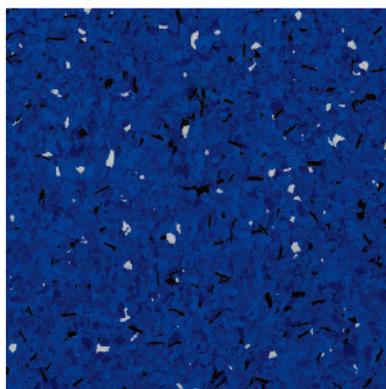

1316-610 Ski Blue




1316-311 Whale Cream

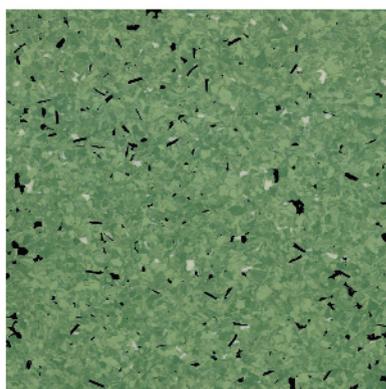

1316-511 Light Jade

ESD 1815
CONDUCTIVE 2815

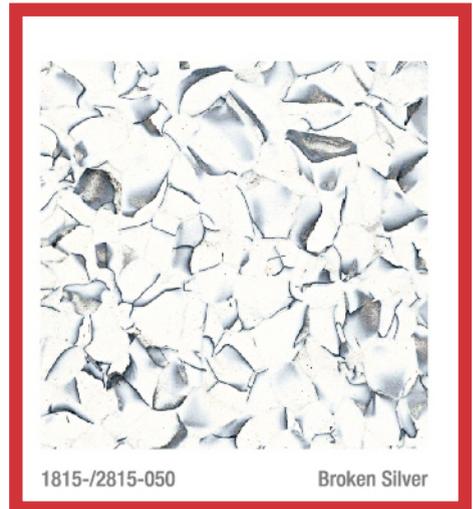

1815-/2815-050 Broken Silver



1815-/2815-021 Light Blue

Technical Data

Structure	Standard	Unit	Pastell Conductive	Pastell ESD
Type of flooring	EN 649 / EN ISO 10581		Vinyl synthetic floor covering with conductive backing	Vinyl synthetic floor covering with conductive backing
Overall thickness	EN 428 / EN ISO 24346	mm	2	2
Sheet width / length	EN 426 / EN ISO 24341	m	2m/16-20m	2m/16-20m
Total weight	EN 430 / EN ISO 23997	g/m ²	3000g/m ²	3000g/m ²
Safety criteria				
Flammability	EN 13501-1	class	Bfl - s1	Bfl - s1
Slip resistance	DIN 51130	group	R9	R9
REACH Regulation No. 1907/2006	REACH 181		contains no substances mentioned in the SVHC-list	contains no substances mentioned in the SVHC-list
Performance				
Impact sound reduction	EN ISO 10140	dB	3	3
Residual indentation	EN 433 / EN ISO 24343	mm	0.05	0.05
Wear resistance	EN 649	group	P	P
Color fastness	ISO 105-B02	rating	≥6	≥6
Vertical resistance R1	EN 1081	Ω	< 1.0x10 ⁶	1.0x10 ⁶ - 1.0x10 ⁹
Surface resistance	EN 1081	Ω	< 1.0x10 ⁶	1.0x10 ⁶ - 1.0x10 ⁹
Static electrical charge	EN 1815	kV	≤ 2.0	≤ 2.0
Thermal resistance	EN 12667	m ² K/W	0.04	0.04
Resistance against chemicals	EN 423 / EN ISO 26987		good resistance	good resistance
Castor chair	EN 425	Type W	Suitable	Suitable
Classification				
Domestic	IOS 10874-EN 685	class	23 heavy duty	23 heavy duty
Commercial	IOS 10874-EN 685	class	34 very heavy duty	34 very heavy duty
Industrial	IOS 10874-EN 685	class	43 heavy duty	43 heavy duty



Sample piece in this sample folder is only for color reference, the structure and color of which may be varied in actual product supplying

www.armstrongflooring.asia

ARMSTRONG FLOORING OFFICES:

	TEL:	FAX:
Hong Kong	(852) 2585 7800	(852) 2598 7181
Singapore	(65) 6604 6836	(65) 6604 6835
Malaysia	(60) 379 323 331	(60) 379 606 331
Indonesia	(62) 21 2965 7866	(62) 21 2965 7867

